



Pre-Con 3 Automatic Suction Valve

Typical friction loss based on actual flow test. Test facilities were designed to simulate fire flow conditions. Flows that you obtain may vary

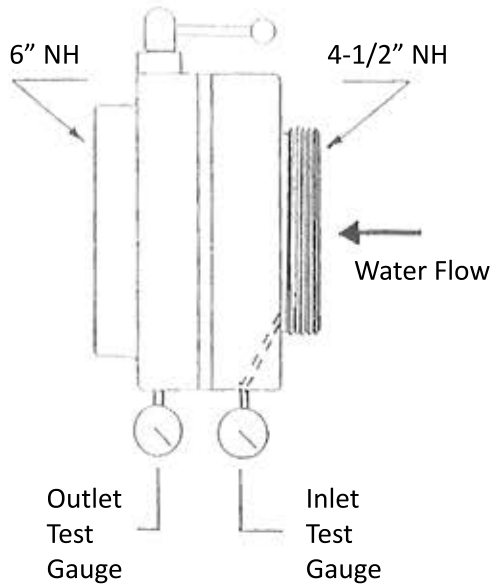

- Water Main - 12" Diameter
- Static Pressure - 80 PSI
- Pumper - 1500 GPM
- Suction Hose - 10' x 4 1/2"
- Hose Lay - Two Deluge Sets
- Flow Calibration - Pitot Gauge

Friction Loss

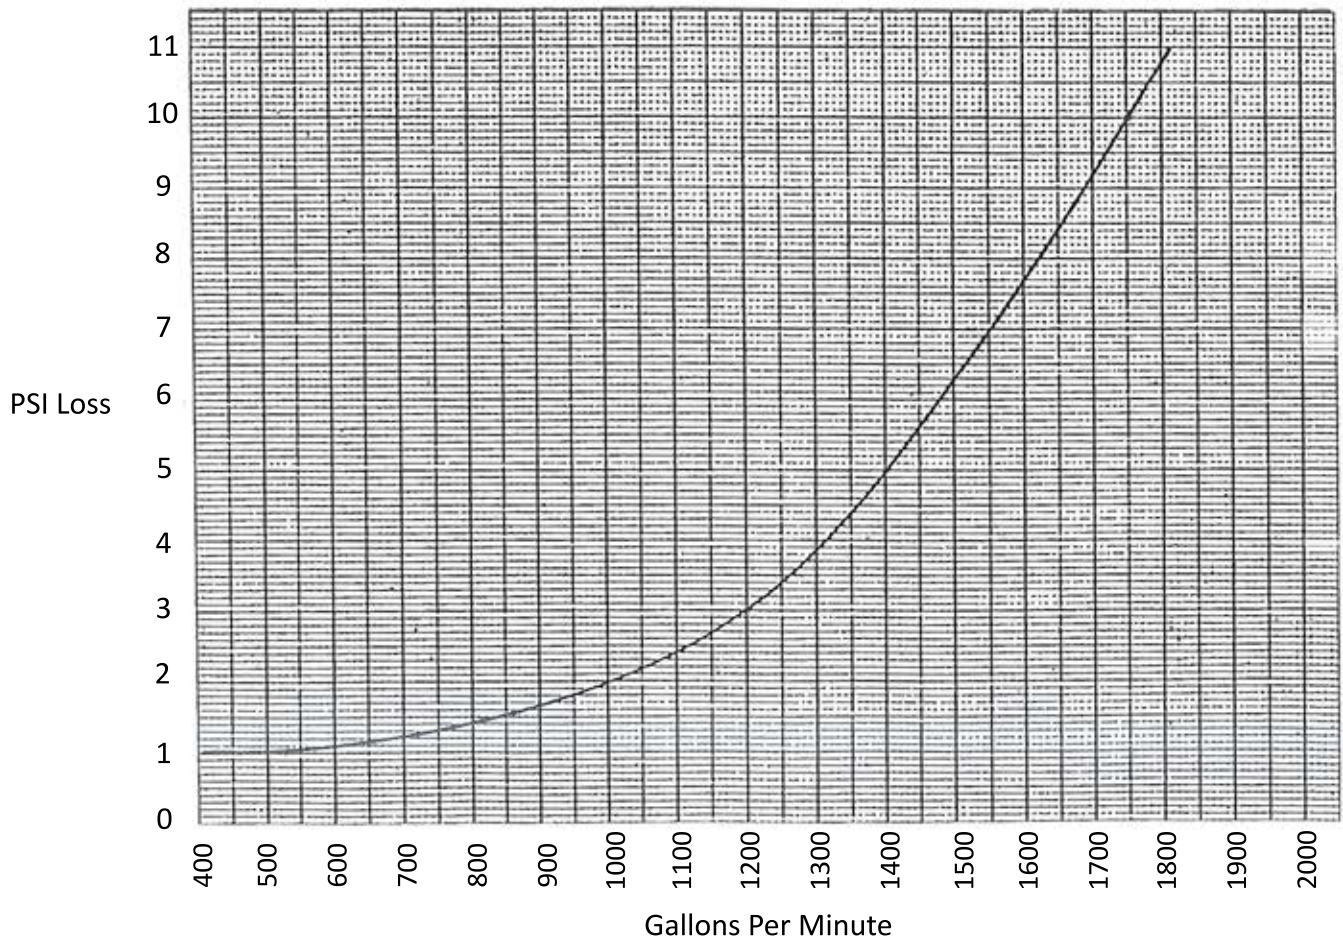

Note: Add 2 psi for spring resistance in "free floating" position.