


4.0" Female Pipe Thread STORZ ADAPTER SPEC SHEET

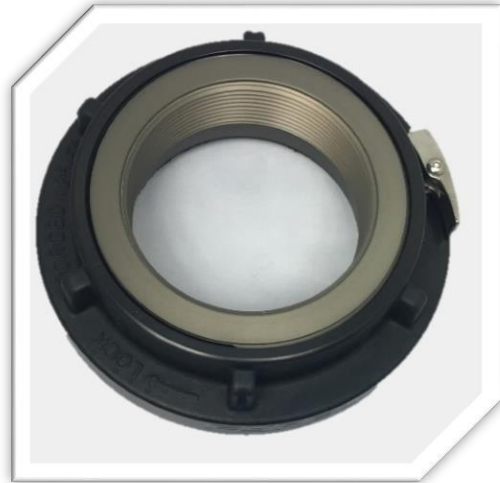

Description: Fyrelane USA - 4" Pipe thread x 5" storz adapters are a quick connecting device that allows you to quickly connect up to a stand pipe or a FDC connection.

Material: Fyrelane USA - 4" Female Pipe Thread Adapters are constructed of forged 6061 aircraft grade aluminum alloy and heat treated to a T-6.

Standard Operating Pressure: Operating Pressure 250 PSI

Design Pressure: Minimum 3x Operating Pressure (750 PSI)

NFPA 1963: Conforms to the NFPA 1963 (2014 standard edition)

Product Finish: The Coating on our Fyrelane USA 4" Female Pipe Threaded adapters are a MIL-A-8625 (Mil Spec) Type III anodize. The outer head ring is hard coat anodized class II with a black color dye additive. The inner insert is hard coat anodized class I without color dye additive. Hard coat anodizing provides a more durable finish to help withstand harsh environments.

Benefits of Hard Coat Anodizing: Benefits of hard coat anodized aluminum would be as follows, corrosion resistance, improved lubrication, increase wear resistance, increase abrasion resistance, flame resistance, & non-contaminating.

Sizes Available: 4" Storz, 5" Storz

Weight of Product: 3.35 LBS